

Table Substrate

All top panels and end caps are high strength alloy 6063-T6 extruded aluminum with a smooth finish. Table tops are constructed of individual aluminum boards with laminate adhered to surface. Top surfaces are .080" thick with integral stiffener ribs.

Painted legs are thermal set powder-coated finishes and have the hardest surface and maximum scratch/mark resistant qualities in the industry. Fasteners are aluminum and/or zinc plated steel.

Table Surface

Inlay surface is high pressure laminate with premium scratch resistant finish, permanently bonded with contact adhesive.

Edgeband

1 1/2" x 2mm pvc vinyl edgeband material extruded and secured with a custom tongue and groove design.

Gathering leg styles

Table legs are made from 1/8" x 3" x 3" square, high strength alloy 6063-T6 extruded aluminum.

Leg style heights are available in 36" high, 36" with casters, 42" high and 42" with casters. Powder-coat paint is applied for finishing on all legs. Tube openings are covered by caps. Painted legs are thermal set powder-coated finishes and have the hardest surface and maximum scratch/mark resistant qualities in the industry. Fasteners are aluminum and/or zinc plated steel.

Load Capacity

All table tops will support up to 3,000 lbs. of distributed weight.

Sustainability

Aluminum extrusions contain 70% recycled aluminum; 10% is post-consumer content, and 60% pre-consumer content. Southern Aluminum products are 100% recyclable. Laminate is GREENGUARD certified for low emissions. Laminate adhesive does not contain urea-formaldehyde resins.

Available Sizes

GL Table™ Top

Top Size	Model #
GL Table Top 30 3/4" x 72"	GL3172

GL Table™ Legs

Leg Size	Model #
36" - Coffee Break/Buffer	GLG364
36" w/ Casters	GLG364C
42" - Front Bars/Communal	GLG424
42" w/ casters	GLG42C

*Sets of 4



Top - GL3172

Legs - GLG364C

Enclosure Panel & Shelf

Enclosure panel and shelves are constructed from 1" X 6" 6063-T6 extruded aluminum channels and assembled with zinc plated nuts and bolts. Both are applied with a durable powder coat finish.

GL Bar Speed Rail

Easily convert your GL Table to a modular bar by simply adding a set of speed rails to the apron of the table. Crafted from durable powder coated aluminum, the speed rail is perfect for maximizing space and requires minimal maintenance. ABS construction with Plexiglas® inserts. Hangers are machined from 6063-T6 aluminum.

Power Options

Hide-A-Way power quickly flips down from underneath the table to present the perfect power option.

GL Bar System

Description	Model #
Bar System	GLSYS

GL Table™ Enclosure Panel

Description	Model #
36" High Enclosure Panel	GL30MP36
36" High Enclosure Panel for Caster Legs	GL30MP36C
42" High Enclosure Panel	GL30MP42
42" High Enclosure Panel for Caster Legs	GL30MP42C

GL Bar Speed Rail


Description	Model #
Speed Rail for 36" GL Table	GL36DSR
Speed Rail for 42" GL Table	GL42DSR

GL Shelf

Description	Model #
Shelf for GL Enclosure Panel	GLSHELF

GL Power Unit

Description	Model #
Flip-Down Power Unit	GLFDPWROPT

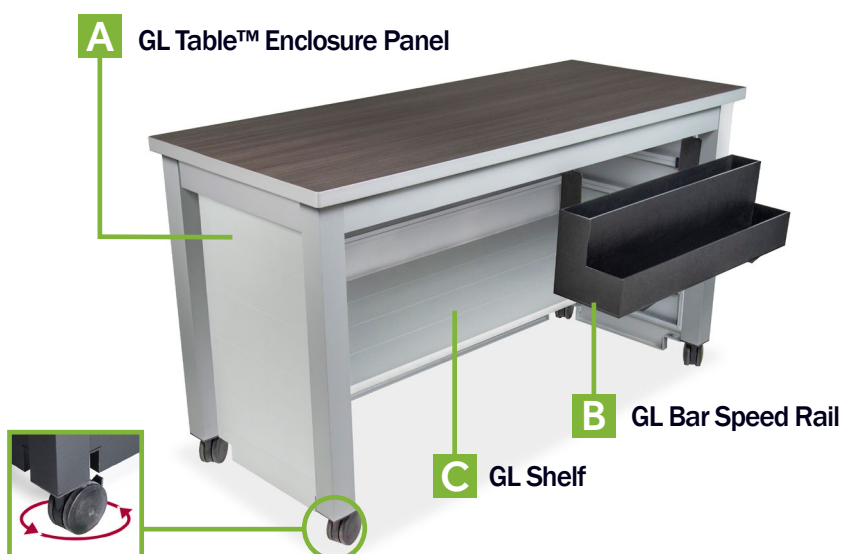



Alulite® Table Top

All top surfaces are .080" thick with integral stiffener ribs and have 1½" profile edge. Table tops are constructed of individual boards bolted together and have longitudinal seams. Table tops will not crack or warp after extended usage or exposure to heat, moisture or sunlight. All edges on the table top have a rounded radius edge, including corners. Tables will not emit toxic fumes, gases or smoke in high temperatures related to a fire (passes California Fire Code 133). Tops are available in selected powder-coat paint colors.

Gathering leg styles

Table legs are made from 1/8" x 3" x 3" square, high strength alloy 6063-T6 extruded aluminum.

Leg style heights are available in 36" high, 36" with casters, 42" high and 42" with casters. Powder-coat paint is applied for finishing on all legs. Tube openings are covered by caps. Painted legs are thermal set powder-coated finishes and have the hardest surface and maximum scratch/mark resistant qualities in the industry. Fasteners are aluminum and/or zinc plated steel.

Load Capacity


All table tops will support up to 3,000 lbs. of distributed weight.

Sustainability

Aluminum extrusions contain 70% recycled aluminum; 10% is post-consumer content, and 60% pre-consumer content. Southern Aluminum products are 100% recyclable. Laminate is GREENGUARD certified for low emissions. Laminate adhesive does not contain urea-formaldehyde resins.

Design Options

Available Finishes*



* Printed colors may vary from the actual product.

Available Sizes

GL Table™ Top

Top Size	Model #
GL Table Top 30¼" x 72"	GL3172A

GL Table™ Legs

Leg Size	Model #
36" - Coffee Break/Buffer	GLG364
36" w/ Casters	GLG364C
42" - Front Bars/Communal	GLG424
42" w/ casters	GLG42C

*Sets of 4



Top - GL3172A

Legs - GLG364C